


SPECTRUM III MOIR



OEM MAGSTRIPE ONLY INSERT READER MODULE

KEY FEATURES:

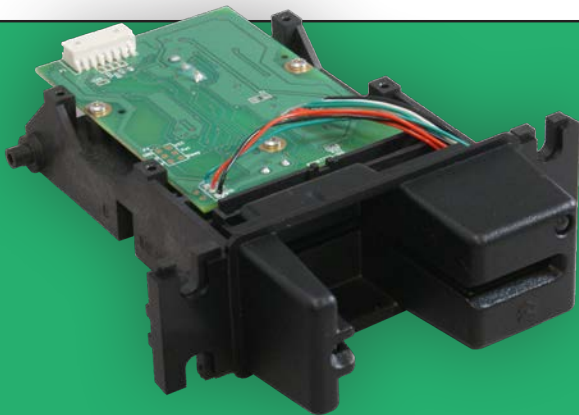


- Reads & decodes up to three tracks of magnetically encoded information
- Reliable electronics guarantees for over one million card cycles
- Choice of standard, metal, or flush mount bezels
- User-transaction confirmation
- Optional gate prevents coins & debris from jamming the card slot
- PC operating system provides USB-CDC drivers for standard operating function



SPECTRUM III MOIR SPECS

CONNECTIVITY	Keyboard Wedge, RS232, USB-CDC (virtual COM) & USB-HID/KB
CHASSIS & BEZEL	1,000,000 Card Cycles Minimum
DIMENSIONS	117mm (L) x 101mm (W) x 9.88mm (H)
HUMIDITY	Maximum 95%, Non-Condensing
MAGNETIC HEAD LIFE	1,000,000 Card Cycles Minimum
MEDIA FORMATS	AAMVA Driver License Format, ISO 7811 (Coercivity of 300 to 4,200 Oersted)
MEDIA THICKNESS	0.025 Inches (0.635mm) to 0.035 Inches (0.889mm)
OPERATING TEMPERATURE	0°C to 55°C
POWER REQUIREMENTS	RS232: +5 VDC/55mA (Power Adapter Regulated 5 VDC/250mA or Equivalent) USB: + 5 VDC/55mA Power Supplied by the Host Computer
STORAGE TEMPERATURE	0°C to 55°C
SWIPE SPEED	3 to 50 Inches per Second
WARRANTY	One Year, Parts & Labor

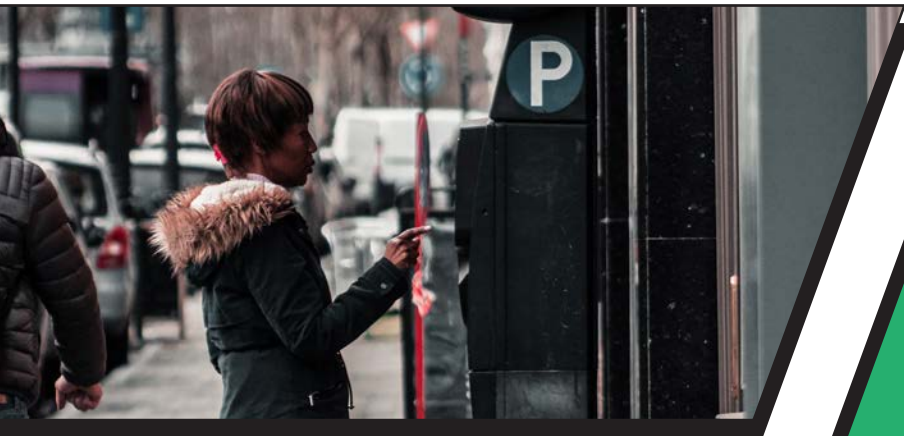

CORPORATE HEADQUARTERS

10721 WALKER STREET
 CYPRESS, CA 90630
 T: (714) 761-6368
 TF: (800) 984-1010
 F: (714) 761-8880
 SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
 ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
 SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
 ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

